


SECTION A-A

Max. 300 mm.

- 1 Shadow moulding 41140017, attached to wall at 300 mm with screw with pan-head.
- 2 24 mm main beam (Cross-Lock Unipro) 4118181, with cc distance 1200 mm.
- 3 24 mm Cross profile (Cross-Lock Unipro) 4118181, cc distance 300 mm.
- 4 Adjustable hanger with cc distance 1200 mm.
- 5 Cross-Lock connector 4207005, cc distance 300 mm.
- 6 10 mm Gypstone Xtensiv plasterboard with edge E15/B (perforated / not perforated).
- 7 Connecting bracket for supporting the grid on every second main beam.

It may be an advantage to use a wooden moulding when attaching the wall angle in order to absorb possible unevennesses of the wall.

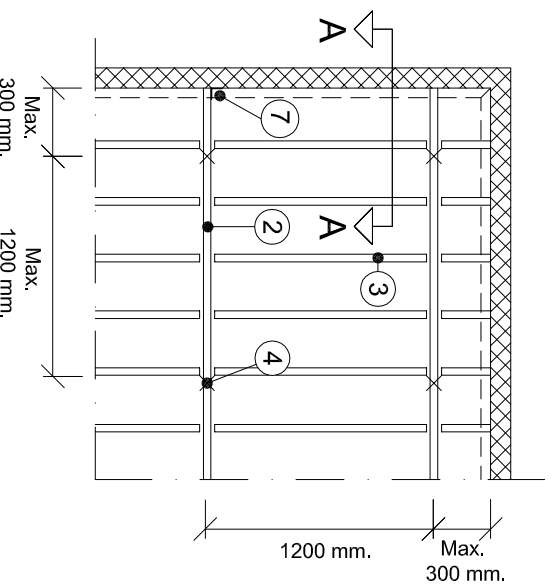

PLAN CUTOUT

STANDARD DETAIL

System Xtensiv ceiling

Notation Wall attachment with shadow moulding.

Scale	Date	Rev.	Rev. date
1:2	06/08-2014		

Nr. X-001

GYPTONE